

MONZA 10W LED Dimmable Downlight (Black)

4000K 880lm



Product Code: PXMZ10B



Technical Specifications

Model	Voltage	Power	Power Factor	Lumen (±5%)	Beam Angle	CCT	Lifespan	CRI	Dimensions
10W	AC230V	10W	≥0.9	880	90°	4000K	40000h	≥80	Ø115*58mm cutout Ø90-100mm




Driver Data Sheet

Driver Data	Dimmable
Input Rated Voltage	AC230V
Frequency	50Hz
Input Voltage	AC200-240V
Efficiency	≥83%
Total Load Wattage	10W±1W
Power Factor	≥0.9
Rated Input Current	≤0.06A
Full Load Output Voltage	35-38V
Rated Output Current	225mA
Output Current Range	225mA±5%
Power Tolerance	±5%
Current Output Tolerance	±5%
Dimming Range	10%-100%
Dimmer	Triac Dimmers
Short Circuit Protection	PASS
Over Voltage Protection	PASS
Over Temperature Protection	PASS

Fixture Compatibility

Rated Wattage	10W
Electrical Classification	II
Ingress Protection	IP54
Operating Temperature	-20°C~45°C
Operating Humidity	0~90%
Storage Temperature	-20°C~65°C

Beam Angle

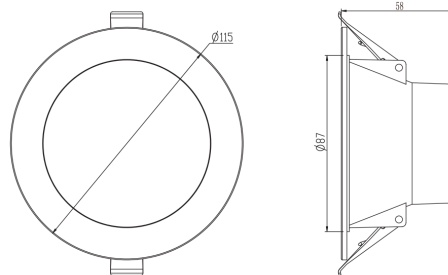

The Prelux Monza 10W LED Downlight adopts high lumen SMD LEDs and a PMMA diffuser with an even light output. The housing material is V0-fire rated plastic which provides excellent thermal dissipation to greatly add to the life of the LEDs.

- Environmentally friendly, without Mercury or other hazardous substances
- Up to 70% energy saving compared to standard CFL
- Long lifetime of 40,000 hours
- Dimmable when using Triac Dimmer
- 90° wide beam angle
- Ø90-100mm cutout
- CCT: 4000K
- No UV/IR light